

# Multi-port 10/100/1000T 802.3bt PoE + 4-Port 10G SFP+ Managed Ethernet Switch



## Perfect Managed PoE++ Switches with Advanced L2/L4 Switching and Security

PLANET GS-4210-16UP8T4X and GS-4210-24UP4X Gigabit 802.3bt PoE++ Managed Switches feature PLANET intelligent PoE functions to improve the availability of critical business applications. They provide IPv6/IPv4 dual stack management and a built-in L2/L4 Gigabit switching engine. The GS-4210-16UP8T4X comes with 16 10/100/1000BASE-T 802.3bt PoE++ ports, 8 additional Gigabit copper ports, and 4 10 Gigabit fiber ports, with a total power budget of 420 watts. The GS-4210-24UP4X comes with 24 10/100/1000BASE-T 802.3bt PoE++ ports and 4 10 Gigabit fiber ports, with a total power budget of 720 watts. The GS-4210-Series offers a quick, safe, and cost-effective 802.3bt PoE++ network solution for small businesses and enterprises.

## Cybersecurity Network Solution to Minimize Security Risks

The cybersecurity feature included to protect the switch management in a mission-critical network virtually needs no effort and cost to install. Both SSHv2 and TLSv1.2 protocols are utilized to provide strong protection against advanced threats. The network administrator can now construct highly-secure corporate networks with considerably less time and effort than before.



## Redundant Ring, Fast Recovery for Critical Network Applications

The GS-4210-Series supports redundant ring technology and features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced ITU-T G.8032 ERPS (Ethernet Ring Protection Switching)

## Physical Port

- **GS-4210-16UP8T4X**
  - 16 10/100/1000BASE-T ports with 95W 802.3bt PoE++ injector function (Ports 1 to 16)
  - 8 10/100/1000BASE-T ports (Ports 17 to 24)
  - 4 10GBASE-SR/LR SFP+ slots, backward compatible with 100/1G/2.5GBASE-X SFP transceivers (Ports XG1 to XG4)
  - RJ45 to DB9 console interface for switch basic management and setup
- **GS-4210-24UP4X**
  - 24 10/100/1000BASE-T ports with 95W 802.3bt PoE++ injector function (Ports 1 to 24)
  - 4 10GBASE-SR/LR SFP+ slots, backward compatible with 100/1G/2.5GBASE-X SFP transceivers (Ports XG1 to XG4)
  - RJ45 to DB9 console interface for switch basic management and setup

## Switching


- Hardware-based 10/100Mbps (half/full duplex), 1000Mbps (full duplex), auto-negotiation and auto MDI/MDI-X
- IEEE 802.3x flow control for full duplex operation and back pressure for half duplex operation
- 16K MAC address table size
- 12K jumbo frame
- Automatic address learning and address aging

## Power over Ethernet

- Compliant with IEEE 802.3bt Power over Ethernet Plus Plus
- 16/24 ports supporting IEEE 802.3bt PoE++ with each offering up to 95 watts (ports 1-16 / ports 1-24)
- Total PoE power budget of 420/720 watts
- Automatic detection of powered devices (PD)
- Built-in circuit protection to prevent power interference between ports
- Remote power feeding up to 100 meters in standard mode and 250 meters in extend mode
- Advanced PoE management capabilities:

technology, Spanning Tree Protocol (802.1s MSTP) into customer's network to enhance system reliability and uptime in various environments.

### ERPS Ring for Video Transmission Redundancy

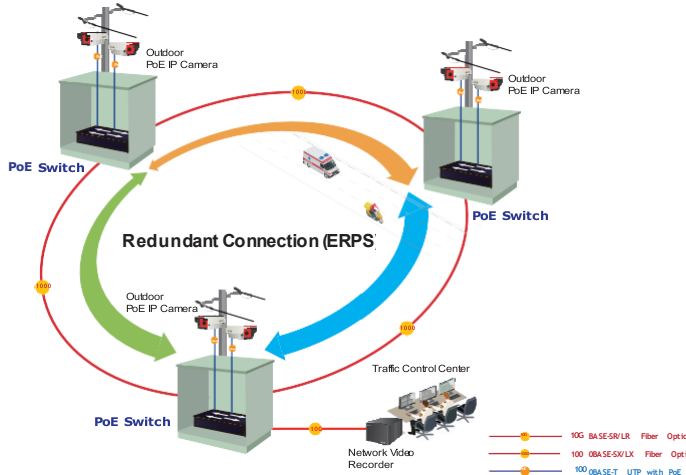

### 802.3bt PoE++ 95-watt Power over 4-pair UTP Solution

As the GS-4210-Series adopts the IEEE 802.3bt PoE++ standard technology, it is capable to source up to **95 watts** of power by using all the four pairs of standard Cat5e/6 Ethernet cabling to deliver power and full-speed data to each remote PoE compliant powered device (PD). Its power capability is three times more than that of the conventional 802.3at PoE+ and it is an ideal solution for those high power consuming network PDs, such as:

- PoE PTZ speed dome cameras
- Network devices
- Thin clients
- AIO (all-in-one) touch PCs, point of sale (POS) and information kiosks
- Remote digital signage displays
- PoE lightings



- Total PoE power budget control
- Per port PoE function enable/disable
- PoE port power feeding priority
- Per PoE port power limitation
- Detection of PD classification
- Intelligent PoE features
  - PD alive check
  - PoE schedule
  - Scheduled power recycling

### Layer 2 Features

- Supports VLAN
  - IEEE 802.1Q tagged VLAN
  - Provider bridging (VLAN Q-in-Q, IEEE 802.1ad) support
  - Protocol VLAN
  - Private VLAN (Protected port)
  - Management VLAN
  - GVRP
- Supports Spanning Tree Protocol
  - STP (Spanning Tree Protocol)
  - RSTP (Rapid Spanning Tree Protocol)
  - MSTP (Multiple Spanning Tree Protocol)
  - STP BPDU Guard, BPDU Filtering and BPDU Forwarding
- Supports Link Aggregation
  - IEEE 802.3ad Link Aggregation Control Protocol (LACP)
  - Cisco ether-channel (static trunk)
  - Maximum 8 trunk groups, up to 8 ports per trunk group
- Supports port mirror (many-to-1)
- Loop protection to avoid broadcast loops
- Supports ERPS (Ethernet Ring Protection Switching)
- Link Layer Discovery Protocol (LLDP)

### Quality of Service

- Ingress and egress rate limit per port bandwidth control
- Storm control support
  - Broadcast/Unknown unicast/Unknown multicast
- Traffic classification
  - IEEE 802.1p CoS
  - TOS/DSCP/IP precedence of IPv4/IPv6 packets
- Strict priority and Weighted Round Robin (WRR) CoS policies

### 802.3bt PoE++ and Advanced PoE Power Output Mode Management

To meet the demand of various powered devices consuming stable PoE power, the GS-4210-Series supports multi-PoE operation modes that include 95-watt 802.3bt type-4 PoE++ mode and 4-pair legacy mode to solve the incompatibility of non-standard 4-pair PoE PDs in the field.

- 95W 802.3bt PoE++ Power Output Mode
- 36W End-span 802.3at PoE+ Power Output Mode

| PoE Watts | PoE Operation Mode   | Power Output Mode                   |
|-----------|----------------------|-------------------------------------|
| 95W       | 802.3bt PoE++        | (Pins 1, 2, 3, 6 + Pins 4, 5, 7, 8) |
| 36W       | End-span 802.3at PoE | (Pins 1, 2, 3, 6)                   |

### Built-in Unique PoE Functions for Powered Devices Management

As it is the managed PoE++ switch for surveillance, wireless and VoIP networks, the GS-4210-Series features the following special PoE management functions:

- PD Alive Check
- Scheduled Power Recycling
- PoE Schedule
- PoE Usage Monitoring
- PoE Extension

### Intelligent Powered Device Alive Check


The GS-4210-Series can be configured to monitor connected PD status in real time via ping action. Once the PD stops working and responding, the GS-4210-Series will resume the PoE port power and bring the PD back to work. It will greatly enhance the network reliability through the PoE port resetting the PD's power source and reducing administrator management burden.

### PD Alive Check



### Scheduled Power Recycling

The GS-4210-Series allows each of the connected PoE IP cameras or PoE wireless access points to reboot at a specified time each week. Therefore, it will reduce the chance of IP camera or AP crash resulting from buffer overflow.

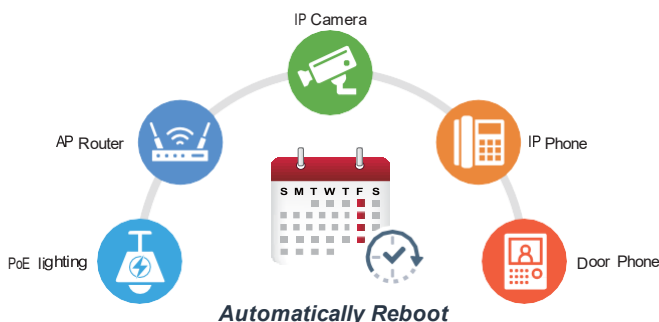

### Multicast

- Supports IPv4 IGMP snooping v2 and v3
- Supports IPv6 MLD snooping v1, v2
- IGMP querier mode support
- IGMP snooping port filtering
- MLD snooping port filtering

### Security


- Authentication
  - Built-in RADIUS client to cooperate with the RADIUS servers
  - RADIUS/TACACS+ login user access authentication
  - DHCP Option 82
- Access control list
  - IPv4/IPv6 IP-based ACL
  - IPv4/IPv6 IP-based ACE
  - MAC-based ACL
  - MAC-based ACE
- MAC security
  - Static MAC
  - MAC filtering
- Port security for source MAC address entries filtering
- DHCP snooping to filter distrusted DHCP messages
- Dynamic ARP Inspection discards ARP packets with invalid MAC address to IP address binding
- IP source guard prevents IP spoofing attacks
- DoS attack prevention

### Management

- IPv4 and IPv6 dual stack management
- Switch management interface
  - Web switch management
  - Console and telnet command line interface
  - SNMP v1 and v2c switch management
  - SSHv2, TLSv1.2 and SNMP v3 secure access
- SNMP Management
  - Four RMON groups (history, statistics, alarms and events)
  - SNMP trap for interface link up and link down notification
- User privilege levels control
- Built-in Trivial File Transfer Protocol (TFTP) client
- Static and DHCP for IP address assignment
- System maintenance

### PoE Schedule for Energy Savings

Under the trend of energy savings worldwide and contributing to environmental protection, the GS-4210-Series can effectively control the power supply besides its capability of giving high watts power. The “**PoE schedule**” function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs or Enterprises save power and money. It also increases security by powering off PDs that should not be in use during non-business hours.

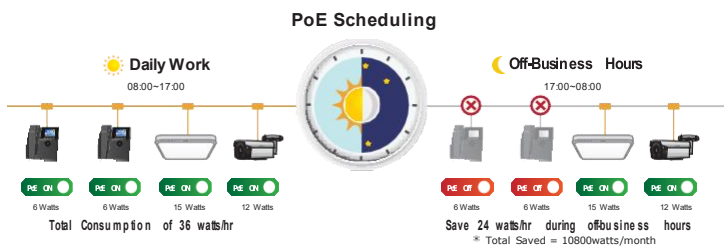


### PoE Usage Monitoring

Via the power usage chart in the web management interface, the GS-4210-Series enables the administrator to monitor the status of the power usage of the connected PDs in real time. Thus, it greatly enhances the management efficiency of the facilities.

### 802.3at PoE+ Power and Ethernet Data Transmission Distance Extension

In the “**Extend**” operation mode, the GS-4210-Series operates on a per-port basis at 10Mbps duplex operation but can support 50-watt PoE power output over a distance of up to 250 meters overcoming the 100m limit on Ethernet UTP cable. With this brand-new feature, the GS-4210-Series provides an additional solution for 802.3at/af PoE distance extension, thus saving the cost of Ethernet cable installation.

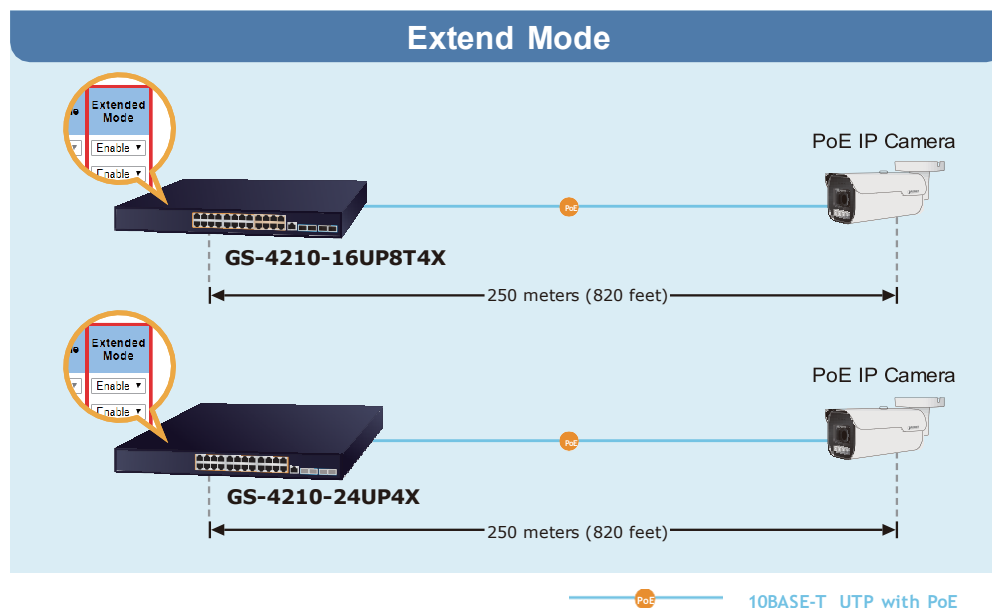


### Environment-friendly, Smart Fan Design for Silent Operation

The GS-4210-16UP8T4X and GS-4210-24UP4X feature a rack-mount metal housing, a low noise design and an effective ventilation system. It supports the smart fan technology that automatically controls the speed of the built-in fan to reduce noise and maintain the temperature of the PoE switch for optimal power output capability. They are able to operate reliably, stably and quietly in any environment without affecting their performance.

- Firmware upload/download via HTTP/TFTP
- Configuration upload/download through HTTP/TFTP
- Dual images
- Hardware-based reset button for system reboot or reset to factory default
- SNTP Network Time Protocol
- Network Diagnostic
  - SFP-DDM (digital diagnostic monitor)
  - Cable diagnostics
  - ICMPv4/ICMPv6 remote ping
- Link Layer Discovery Protocol (LLDP) and LLDP-MED
- Event message logging to remote syslog server
- PLANET Smart Discovery Utility for deployment management
- PLANET NMS and NMSViewerPro/CloudViewerPro for deployment management
- PLANET NMS and CloudNMS for deployment management


### IPv6/IPv4 Dual Stack Management

Supporting both IPv6 and IPv4 protocols, the GS-4210-Series helps the SMBs to step in the IPv6 era with the lowest investment as its network facilities need not be replaced or overhauled if the IPv6 FTTx edge network is set up.

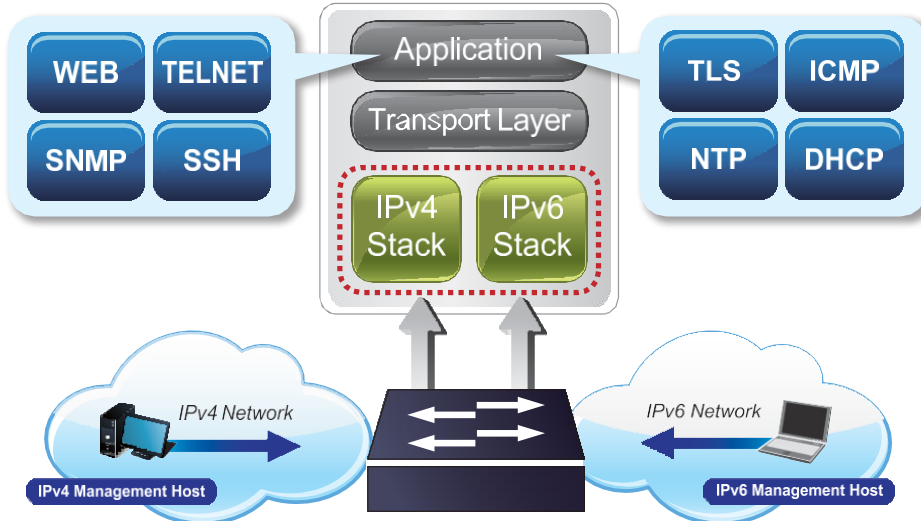

### Robust Layer 2 Features

The GS-4210-Series can be programmed for advanced switch management functions such as dynamic port link aggregation, 802.1Q VLAN and **Q-in-Q VLAN**, **Multiple Spanning Tree Protocol (MSTP)**, loop and **BPDU guard**, **IGMP snooping**, and **MLD snooping**. Via the link aggregation, the GS-4210-Series allows the operation of a high-speed trunk to combine with multiple ports, and supports fail-over as well. Also, the **Link Layer Discovery Protocol (LLDP)** is the Layer 2 protocol included to help discover basic information about neighboring devices on the local broadcast domain.

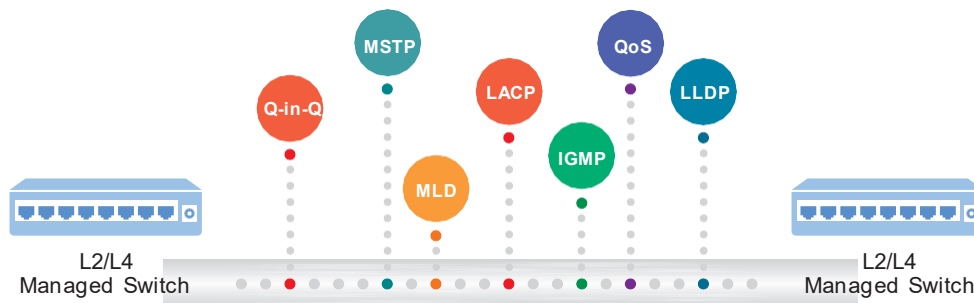

### Efficient Traffic Control

The GS-4210-Series is loaded with robust QoS features and powerful traffic management to enhance services to business-class data, voice and video solutions. The functionality includes broadcast/multicast **storm control**, per port **bandwidth control**, IP DSCP QoS priority and remarking. It guarantees the best performance for VoIP and video stream transmission, and empowers the enterprises to take full advantage of the limited network resources.

### Powerful Security

The GS-4210-Series offers comprehensive Layer 2 to Layer 4 Access Control List (ACL) for enforcing security to the edge. It can be used to restrict network access by denying packets based on source and destination IP address, TCP/UDP ports or defined typical network applications. Its protection mechanism also comprises 802.1x Port-based user authentication. With the private VLAN function, communication between edge ports can be prevented to ensure user privacy.

### Advanced IP Network Protection

The GS-4210-Series also provides **DHCP Snooping**, **IP Source Guard** and **Dynamic ARP Inspection** functions to prevent IP snooping from attack and discard ARP packets with invalid MAC address. The network administrator can now build highly-secure corporate networks with considerably less time and effort than before.

### Efficient Management

For efficient management, the GS-4210-Series is equipped with Command line, Web and SNMP management interfaces.

- With the built-in **Web-based** management interface, the GS-4210-Series offers an easy-to-use, platform-independent management and configuration facility.
- For **text-based** management, it can be accessed via Telnet and the console port.
- By supporting the standard SNMP protocol, the switch can be managed via any SNMP-based management software.



### Remote Management Solution

PLANET's **Universal Network Management System (UNI-NMS)** and CloudNMS apps support IT staff by remotely managing all network devices and monitoring PDs' operational statuses. Thus, they're designed for both the enterprises and industries where deployments of PDs can be as remote as possible, without having to go to the actual location once a bug or faulty condition is found. With the UNI-NMS or CloudNMS app, all kinds of businesses can now be speedily and efficiently managed from one platform.




### PLANET CloudNMS – Cloud-Based Universal Network Management

PLANET's CloudNMS platform and mobile app empower IT staff to remotely manage all network devices and Powered Devices (PDs) in real time. Designed for enterprises and industries, CloudNMS minimizes the need for on-site troubleshooting by providing centralized monitoring, fault detection, and instant alerts. With CloudNMS, businesses can manage diverse network deployments more efficiently, securely, and intelligently—all from a single cloud-based platform.



### Intelligent SFP Diagnosis Mechanism

The GS-4210-Series supports SFP-DDM (Digital Diagnostic Monitor) function that can easily monitor real-time parameters of the SFP for network administrator, such as optical output power, optical input power, temperature, laser bias current and transceiver supply voltage.

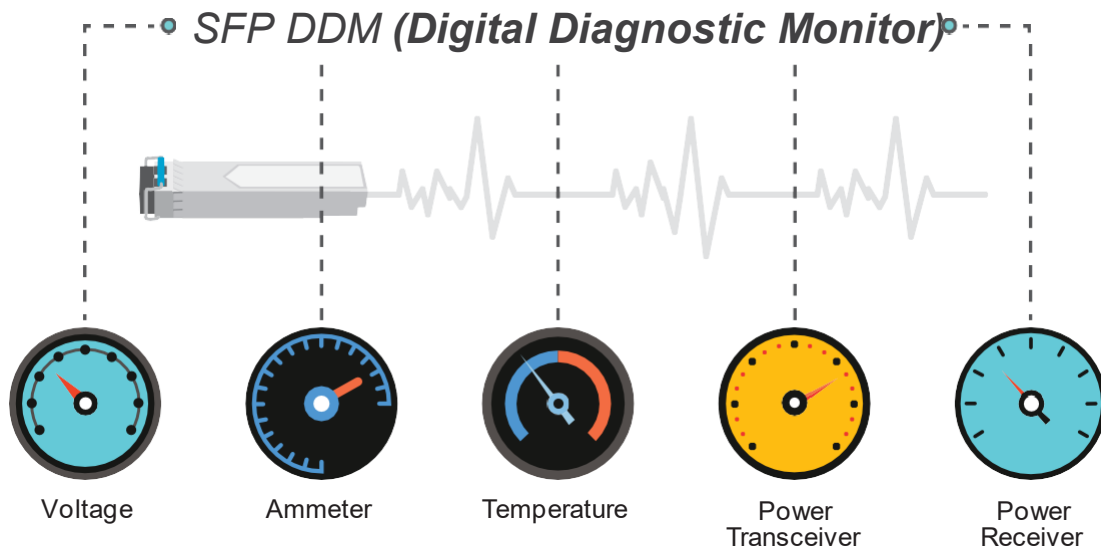

### Flexibility and Long-distance Extension Solution


The GS-4210-16UP8T4X provides 8 additional Gigabit TP interfaces supporting 10/100/1000BASE-T RJ45 copper for connecting surveillance network devices such as NVRs, Video Streaming Servers, or NAS systems to facilitate surveillance management. Alternatively, through its dual-speed fiber SFP slots, it features 100BASE-FX, 1000BASE-SX/LX, 2.5G, and 10G SFP (Small Form-factor Pluggable) fiber transceivers for uplinking to backbone switches and monitoring centers over long distances. The distance can be extended from 550 meters to 2 kilometers (multi-mode fiber) and up to 10/20/40/60/80/120 kilometers (single-mode fiber or WDM fiber). These models are well suited for enterprise data centers and distribution applications.

Additionally, the GS-4210-24UP4X model is available, featuring 24 10/100/1000BASE-T 802.3bt PoE++ ports and 4 10G SFP ports, without additional TP ports. This model is ideal for scenarios requiring extensive PoE functionality and high-speed fiber connections.

## Applications


### ITU-T G.8032 ERPS with PoE IP Surveillance System for SMBs/Workgroups

The GS-4210-Series features strong rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates **ITU-T G.8032 ERPS (Ethernet Ring Protection Switching)** technology into customer's automation network to enhance system reliability and uptime. Applying the IEEE 802.3at Power over Ethernet standard, the GS-4210-Series can directly connect with any IEEE 802.3at end nodes like PTZ (pan, tilt, zoom) network cameras and speed dome cameras. The GS-4210-Series can easily build a power that can centrally control a wireless AP, IP camera and VoIP system for SMBs and workgroups in the enterprises with high availability network infrastructure.

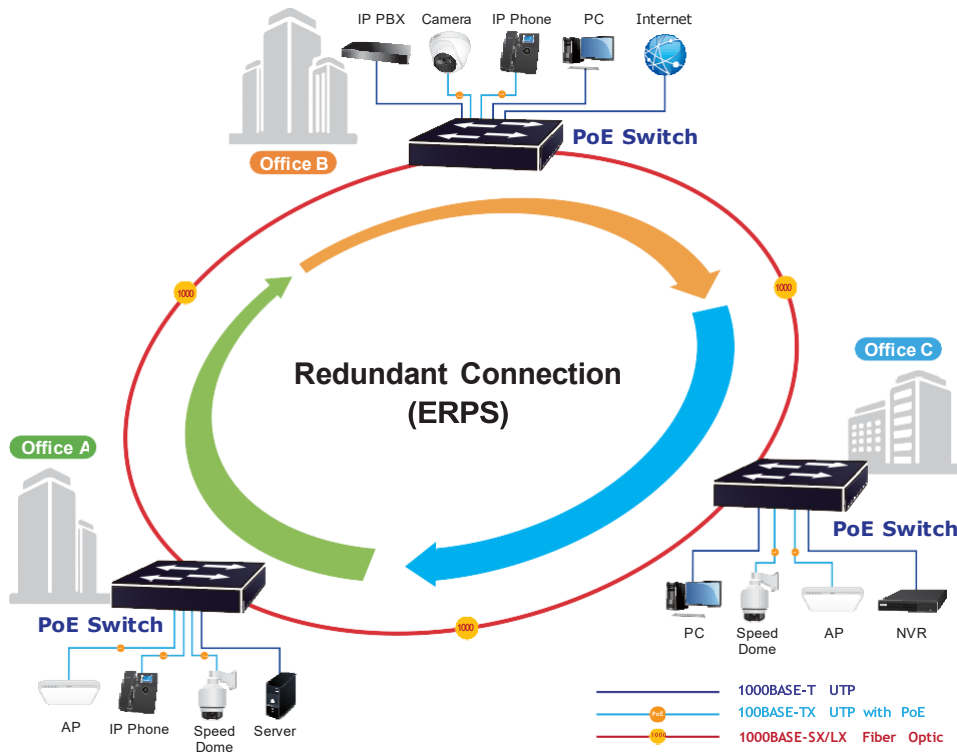

### Gigabit 802.3bt PoE++ and PoE+ Network Deployment Solution

PLANET GS-4210-Series can easily build an 802.3bt PoE++ networking solution on the cyber security system for the enterprises. For instance, it can work with the POS system and thin client to perform comprehensive security protection for today's businesses. The GS-4210-Series and 802.3bt PoE++ Splitter-POE-173S, operate as a pair to provide the easiest way to power your Ethernet devices which need high power input. Receiving data and power from the GS-4210-Series, the POE-173S separates digital data and power into three optional outputs (12V, 19V or 24V DC) to non-PoE devices such as laptops, Thin Client, POS System, PTZ (pan, tilt & zoom) network cameras, PTZ speed dome, color touch-screen IP phones, multi-channel wireless LAN access points and other network devices at distance up to 100 meters.

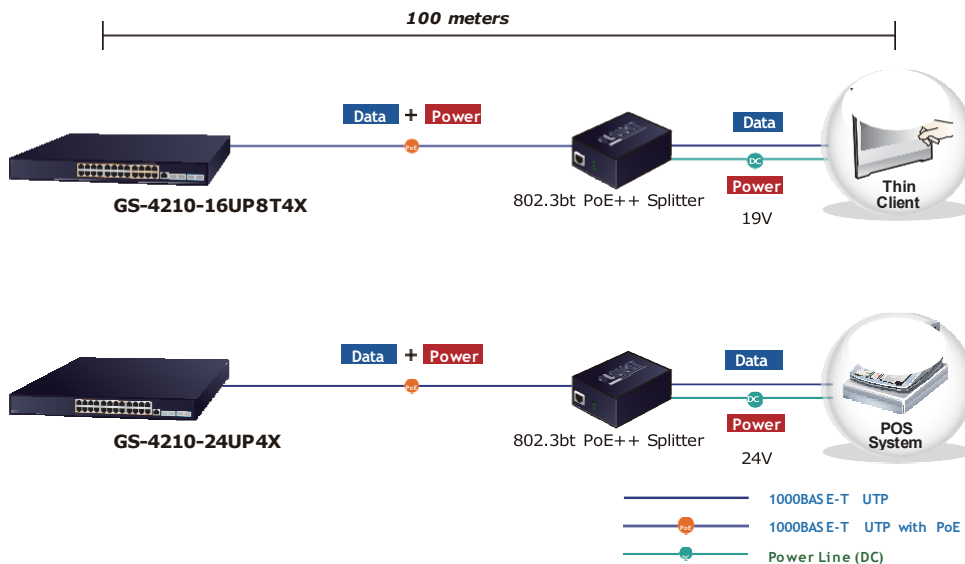

## Specifications

| Product                          | GS-4210-16UP8T4X  | GS-4210-24UP4X   |
|----------------------------------|---|--|
| <b>Hardware Specifications</b>   |   |  |
| Copper Ports                     | 24 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports  |  |
| PoE Injector Port                | 16 ports with 802.3bt PoE++ injector function<br>(Ports 1 to 16)  | 24 ports with 802.3bt PoE++ injector function<br>(Ports 1 to 24) |
| SFP Ports                        | 4 10GBASE-SR/LR SFP+ interfaces (Port XG1 to Port XG4)<br>Backward compatible with 100/1G/2.5GBASE-X SFP transceivers   |  |
| Console                          | 1 x RJ45-to-RS232 serial port (115200, 8, N, 1)   |  |
| Reset Button                     | < 5 sec: System reboot<br>> 5 sec: Factory default  |  |
| Power Requirements               | AC 100~240V, 50/60Hz  |  |
| Power Consumption/ Dissipation   | Maximum 476 watts/1624.02 BTU (full loading)  | Maximum 775 watts/2645.9 BTU (full loading)                      |
| Dimensions (W x D x H)           | 440 x 207 x 44mm  | 440 x 330 x 44mm   |
| Weight                           | 3182g   | 4358g  |
| Installation                     | Rack mount  |  |
| Surge Protection                 | Common mode 4KV, Differential mode 2KV  |  |
| ESD Protection                   | Contact Discharge 6KV DC<br>Air Discharge 8KV DC  |  |
| Fan                              | 2 smart fans  | 4 smart fans   |
| LED                              | <b>System</b><br>Power LED (Green)<br>SYS LED (Green)<br><b>Ports</b><br>10/100/1000 RJ45 Ports LNK/ACT (Green)<br>10G SFP+ Interface LNK/ACT (Green)<br>PoE-in-Use (Amber) |  |
| Fan                              | 2 smart fans  | 4 smart fans   |
| <b>Switch Specifications</b>     |   |  |
| Switch Architecture              | Store-and-Forward   |  |
| Switch Fabric                    | 128Gbps/non-blocking  |  |
| Switch Throughput@64Bytes        | 95.23Mpps @64 bytes   |  |
| Address Table                    | 16K entries   |  |
| Shared Data Buffer               | 12Mbits   |  |
| Flow Control                     | IEEE 802.3x pause frame for full duplex   |  |
| Jumbo Frame                      | Back pressure for half duplex   |  |
| <b>Power over Ethernet</b>       |   |  |
| PoE Standard                     | IEEE 802.3bt PoE++ PSE<br>Backward compatible with IEEE 802.3at/af PoE PSE  |  |
| PoE Power Supply Type            | 802.3bt : End-span+Mid-span<br>802.3at : End-span   |  |
| PoE Power Output                 | Port 1 to 16 – 95W (max.)   | Port 1 to 24 – 95W (max.)  |
| Power Pin Assignment             | 802.3bt/UPoE: 1/2(-), 3/6(+), 4/5(+), 7/8(-)<br>802.3at PoE: End-span: 1/2(-), 3/6(+)   |  |
| PoE Power Budget                 | 420 watts (max)   | 720 watts (max)  |
| Number of 95W 802.3bt Type-4 PDs | 4   | 7  |
| Number of 60W 802.3bt Type-3 PDs | 6   | 12   |
| Number of 802.3at PDs            | 16  | 24   |
| <b>PoE Management Functions</b>  |   |  |
| Enhanced PoE Mode                | System PoE Admin Mode<br>Consumption Mode/Allocation Mode<br>Temperature Threshold  |  |
| Enhanced PoE Mode                | Standard/Legacy/UPoE  |  |
| Active PoE Device Live Detection | Yes   |  |
| PoE Power Recycling              | Yes, daily or predefined schedule   |  |
| PoE Schedule                     | 4 schedule profiles   |  |
| PoE Extended Mode                | Yes, max. up to 250 meters  |  |
| <b>Layer 2 Functions</b>         |   |  |
| Port Mirroring                   | TX/RX/both<br>Many-to-1 monitor<br>Up to 4 sessions   |  |

|                              |   |   |
|------------------------------|---|---|
| VLAN                         | 802.1Q tagged VLAN<br>802.1ad Q-in-Q tunneling (VLAN stacking)<br>Protocol VLAN<br>Private VLAN (Protected port)<br>GVRP<br>Management VLAN<br>Up to 256 VLAN groups, out of 4094 VLAN IDs  |   |
| Link Aggregation             | IEEE 802.3ad LACP and static trunk<br>Supports 8 groups with 8 ports per trunk  |   |
| Spanning Tree Protocol       | IEEE 802.1D Spanning Tree Protocol (STP)<br>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)<br>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)<br>STP BPDU Guard, BPDU Filtering and BPDU Forwarding   |   |
| IGMP Snooping                | IPv4 IGMP snooping v2, v3<br>IGMP querier<br>Up to 256 multicast groups   |   |
| MLD Snooping                 | IPv6 MLD snooping v1, v2, up to 256 multicast groups  |   |
| QoS                          | 8 mapping IDs to 8 level priority queues<br>- Port number<br>- 802.1p priority<br>- DSCP/IP precedence of IPv4/IPv6 packets<br>Traffic classification based, strict priority and WRR<br>Ingress/Egress Rate Limit per port bandwidth control  |   |
| Ring                         | Supports ERPS, and complies with ITU-T G.8032<br>Recovery time < 450ms  |   |
| <b>Security Functions</b>    |   |   |
| Access Control List          | IPv4/IPv6 IP-based ACL/MAC-based ACL<br>IPv4/IPv6 IP-based ACE/MAC-based ACE<br>Max. 256 ACL entries  |   |
| Port Security                | Built-in RADIUS client to co-operate with RADIUS server<br>RADIUS/TACACS+ user access authentication  |   |
| MAC Security                 | IP-MAC port binding<br>MAC filter<br>Static MAC address, max. 256 static MAC entries  |   |
| Enhanced Security            | DHCP Snooping and DHCP Option82<br>STP BPDU guard, BPDU filtering and BPDU forwarding<br>DoS attack prevention<br>ARP inspection<br>IP source guard   |   |
| <b>Management Functions</b>  |   |   |
| Basic Management Interfaces  | Console<br>Web browser<br>Telnet<br>SNMP v1, v2c  |   |
| Secure Management Interfaces | SSHv2, TLS v1.2, SNMP v3  |   |
| System Management            | Firmware upgrade by HTTP/TFTP protocol through Ethernet network<br>Configuration upload/download through HTTP/TFTP<br>LLDP protocol<br>SNTP<br>PLANET Smart Discovery Utility<br>PLANET NMS/CloudNMS  |   |
| Event Management             | Remote/Local Syslog<br>System log   |   |
| SNMP MIBs                    | RFC 1213 MIB-II<br>RFC 1215 Generic Traps<br>RFC 1493 Bridge MIB<br>RFC 2674 Bridge MIB Extensions<br>RFC 2737 Entity MIB (Version 2)<br>RFC 2819 RMON (1, 2, 3, 9)<br>RFC 2863 Interface Group MIB<br>RFC 3635 Ethernet-like MIB<br>RFC 3621 Power Ethernet MIB<br>LLDP MIB<br>PLANET-Aggr-MIB<br>PLANET-DDMI-MIB<br>PLANET-Firmware-MIB | PLANET-GVRP-MIB<br>PLANET-LACP-MIB<br>PLANET-SYSUTIL-MIB<br>PLANET-CONFIG-VLANDATA-MIB<br>PLANET-CONFIG-PORTDATA-MIB<br>PLANET-CONFIG-QOSDATA-MIB<br>PLANET-CONFIG-LACPPORTDATA-MIB<br>PLANET-CONFIG-REMOTESYSLOG-MIB<br>PLANET-CONFIG-SNTPDATA-MIB<br>PLANET-CONFIG-UPGRADEDATA-MIB<br>PLANET-CONFIG-BACKUPDATA-MIB<br>PLANET-CONFIG-SYSTEM-MIB_v2<br>PLANET-CONFIG-LLDPDATA-MIB |

**Standards Conformance**


|                        |   |
|------------------------|---|
| Regulatory Compliance  | FCC Part 15 Class A, CE                     |
| Standards Compliance   | IEEE 802.3 10BASE-T                         |
|                        | IEEE 802.3u 100BASE-TX/100BASE-FX           |
|                        | IEEE 802.3z Gigabit SX/LX                   |
|                        | IEEE 802.3ab Gigabit 1000BASE-T             |
|                        | IEEE802.3ae 10Gb/s Ethernet                 |
|                        | IEEE 802.3x Flow Control and Back Pressure  |
|                        | IEEE 802.3ad Port Trunk with LACP           |
|                        | IEEE 802.1D Spanning Tree Protocol          |
|                        | IEEE 802.1w Rapid Spanning Tree Protocol    |
|                        | IEEE 802.1s Multiple Spanning Tree Protocol |
|                        | IEEE 802.1p Class of Service                |
|                        | IEEE 802.1Q VLAN Tagging                    |
|                        | IEEE 802.1ab LLDP                           |
|                        | IEEE 802.3af Power over Ethernet            |
|                        | IEEE 802.3at Power over Ethernet Plus       |
|                        | IEEE 802.3bt Power over Ethernet Plus Plus  |
|                        | IEEE 802.3az for Energy-Efficient Ethernet  |
|                        | RFC 768 UDP                                 |
|                        | RFC 783 TFTP                                |
|                        | RFC 791 IP                                  |
|                        | RFC 792 ICMP                                |
|                        | RFC 2068 HTTP                               |
|                        | RFC 1112 IGMP v1                            |
| RFC 2236 IGMP v2       |   |
| RFC 3376 IGMP v3       |   |
| RFC 2710 MLD v1        |   |
| RFC 3810 MLD v2        |   |
| ITU-T G.8032 ERPS Ring |   |

**Environment**

|                       |                          |
|-----------------------|--------------------------|
| Operating Temperature | 0 ~ 50 degrees C         |
| Storage Temperature   | -10 ~ 60 degrees C       |
| Humidity              | 5 ~ 95% (non-condensing) |

## Dimensions

■ GS-4210-16UP8T4X

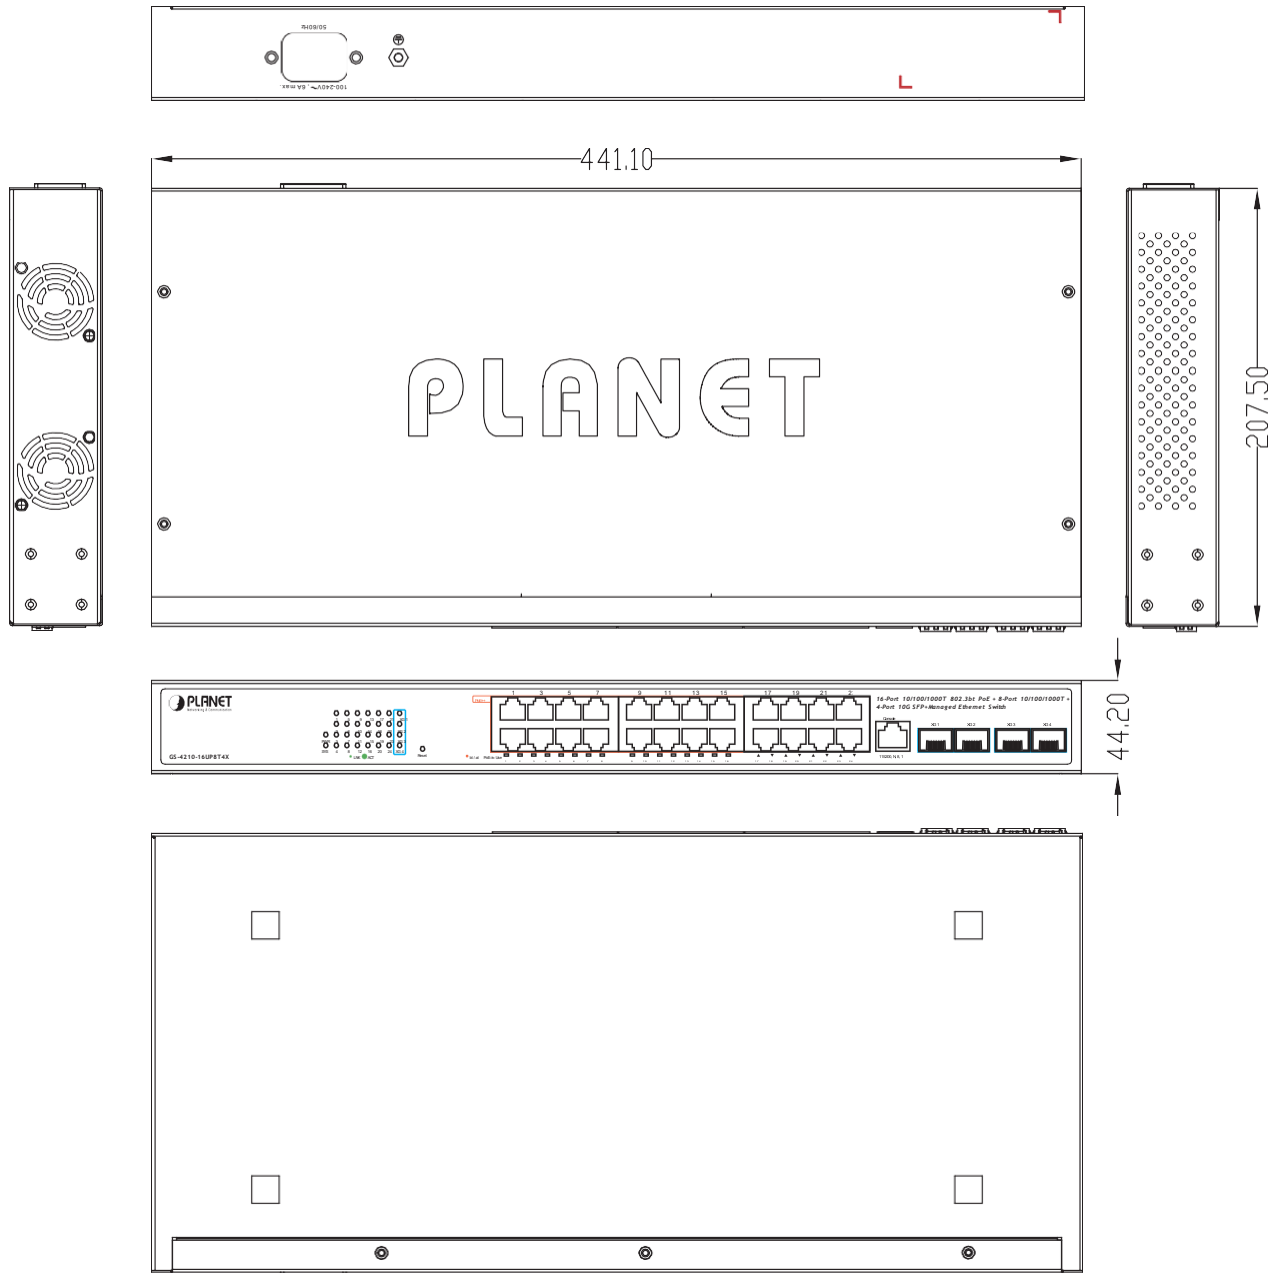

Unit: mm



## Ordering Information

|                  |  |
|------------------|--|
| GS-4210-16UP8T4X | 16-Port 10/100/1000T 802.3bt PoE + 8-Port 10/100/1000T + 4-Port 10G SFP+ Managed Ethernet Switch |
| GS-4210-24UP4X   | 24-Port 10/100/1000T 802.3bt PoE + 4-Port 10G SFP+ Managed Ethernet Switch                       |

## Related Products

|                        |   |
|------------------------|---|
| POE-173S               | Single-Port 10/100/1000Mbps 802.3bt PoE++ Splitter (12V/19V/24V)                          |
| POE-E301               | 1-Port 802.3bt to 1-Port 802.3bt Gigabit PoE++ Extender                                   |
| POE-E304               | 1-Port 802.3bt PoE++ to 4-Port 802.3af/at Gigabit PoE Extender                            |
| WGS-E304PT             | Industrial 1-Port 10/100/1000T 802.3bt PoE++ to 4-Port 802.3at PoE+ Wall-mounted Extender |
| XGS-5240-24X2QR        | Layer 2+ 24-Port 10G SFP+ + 2-Port 40G QSFP+ Stackable Managed Switch                     |
| MTB-Series Module      | 10GBASE-LR/SR/BX/T Modules  |
| MGB-Series Transceiver | 1000BASE-SX/LX SFP Transceiver  |
| MFB-Series Transceiver | 100BASE-FX SFP Transceiver  |

## Available SFP/SFP+ Modules

### 10 Gigabit Ethernet Transceiver (10GBASE-X SFP+)

|          |  |
|----------|--|
| MTB-LB40 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1330nm RX:1270nm) |
| MTB-LA40 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1270nm RX:1330nm) |
| MTB-LB20 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1330nm RX:1270nm) |
| MTB-LA20 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1270nm RX:1330nm) |
| MTB-SR   | 1-Port 10GBASE-SR SFP+ Fiber Optic Module - 300m                       |
| MTB-LR   | 1-Port 10GBASE-LR SFP+ Fiber Optic Module - 10km                       |
| MTB-LA60 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1270nm RX:1330nm) |
| MTB-LB60 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1330nm RX:1270nm) |
| MTB-RJ   | 1-Port 10GBASE-T SFP+ Copper Fiber Optic Module - 30m                  |
| MTB-LR40 | 1-Port 10GBASE-LR SFP+ Fiber Optic Module - 40km                       |
| MTB-SR2  | 1-Port 10GBASE-SR SFP+ Fiber Optic Module - 2km                        |
| MTB-LR20 | 1-Port 10GBASE-LR SFP+ Fiber Optic Module - 20km                       |
| MTB-LR60 | 1-Port 10GBASE-LR SFP+ Fiber Optic Module - 60km                       |
| MTB-LR80 | 1-Port 10GBASE-LR SFP+ Fiber Optic Module - 80km                       |
| MTB-LA10 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 10km (TX:1270nm RX:1330nm) |
| MTB-LB10 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 10km (TX:1330nm RX:1270nm) |

### 2.5 Gigabit Ethernet Transceiver (2500GBASE-X SFP)

|            |   |
|------------|---|
| MGB-2GSR   | 2.5G SFP Transceiver (Multi-mode, 850nm, DDM, 0~70 degrees C) - 300m                    |
| MGB-2GLA20 | 2.5G SFP Transceiver (Single mode WDM, TX:1310nm RX:1550nm, DDM, 0~70 degrees C) - 20km |
| MGB-2GLB20 | 2.5G SFP Transceiver (Single mode WDM, TX:1550nm RX:1310nm, DDM, 0~70 degrees C) - 20km |
| MGB-2GLR20 | 2.5G SFP Transceiver (Single mode, 1310nm, DDM) - 20km                                  |
| MGB-2GLR2  | 2.5G SFP Transceiver (Single mode, 1310nm, DDM) - 2km                                   |

Gigabit Ethernet Transceiver (1000GBASE-X SFP)

|          |   |
|----------|---|
| MGB-GT   | SFP-Port 1000BASE-T Module                                    |
| MGB-LX   | SFP-Port 1000BASE-LX mini-GBIC module - 20km                  |
| MGB-SX   | SFP-Port 1000BASE-SX mini-GBIC module - 550m                  |
| MGB-SX2  | SFP-Port 1000BASE-SX mini-GBIC module - 2km                   |
| MGB-L40  | SFP-Port 1000BASE-LX mini-GBIC module - 40km                  |
| MGB-L80  | SFP-Port 1000BASE-LX mini-GBIC module - 80km                  |
| MGB-L120 | SFP-Port 1000BASE-LX mini-GBIC module - 120km                 |
| MGB-LA10 | SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 10km |
| MGB-LB10 | SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 10km |
| MGB-LA20 | SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 20km |
| MGB-LB20 | SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 20km |
| MGB-LA40 | SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 40km |
| MGB-LB40 | SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 40km |
| MGB-LA80 | SFP-Port 1000BASE-BX (WDM, TX:1490nm) mini-GBIC module - 80km |
| MGB-LB80 | SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 80km |
| MGB-GT   | SFP-Port 1000BASE-T Module                                    |
| MGB-LX   | SFP-Port 1000BASE-LX mini-GBIC module - 20km                  |
| MGB-SX   | SFP-Port 1000BASE-SX mini-GBIC module - 550m                  |
| MGB-SX2  | SFP-Port 1000BASE-SX mini-GBIC module - 2km                   |
| MGB-L40  | SFP-Port 1000BASE-LX mini-GBIC module - 40km                  |
| MGB-L80  | SFP-Port 1000BASE-LX mini-GBIC module - 80km                  |
| MGB-L120 | SFP-Port 1000BASE-LX mini-GBIC module - 120km                 |
| MGB-LA10 | SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 10km |
| MGB-LB10 | SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 10km |
| MGB-LA20 | SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 20km |
| MGB-LB20 | SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 20km |
| MGB-LA40 | SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 40km |
| MGB-LB40 | SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 40km |
| MGB-LA80 | SFP-Port 1000BASE-BX (WDM, TX:1490nm) mini-GBIC module - 80km |
| MGB-LB80 | SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 80km |

Fast Ethernet Transceiver (100BASE-X SFP)

|          |   |
|----------|---|
| MFB-FX   | SFP-Port 100BASE-FX Transceiver (1310nm) -2km         |
| MFB-F20  | SFP-Port 100BASE-FX Transceiver (1310nm) - 20km       |
| MFB-FA20 | SFP-Port 100BASE-BX Transceiver (WDM,TX:1310nm) -20km |
| MFB-FB20 | SFP-Port 100BASE-BX Transceiver (WDM,TX:1550nm) -20km |
| MFB-F40  | SFP-Port 100BASE-FX Transceiver (1310nm) - 40KM       |
| MFB-F60  | SFP-Port 100BASE-FX Transceiver (1310nm) - 60KM       |
| MFB-F120 | SFP-Port 100BASE -FX Transceiver (1550nm) - 120km     |